



PRO-0201 Programmable Infra-Red Remote Control Handset

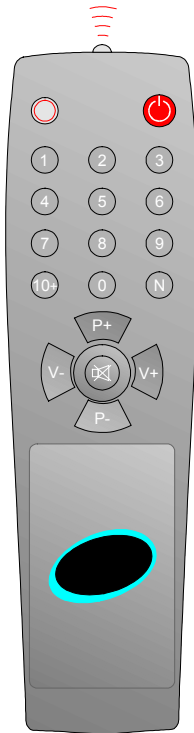


Top View

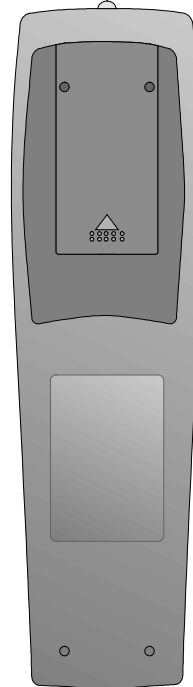


Bottom View

Programmable infra-red remote control handset for the PRO-6000 series and most TV / monitors.

INSTALLATION AND REPLACEMENT OF THE BATTERIES




At the bottom of the unit, while pressing the dotted area of the battery compartment lid slide it forward.

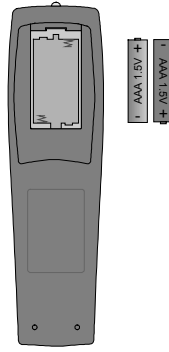

Insert two fresh 1.5 V batteries of the correct type in the position indicated on the figure.



Verify that the batteries are in the correct position and completely inserted into the battery compartment.




Close the battery compartment lid and verify the correct operation of the handset.

SETTING UP BY ENTERING A 3 DIGIT CODE

Please refer to the code list further down this manual and look up the 3 digit code which corresponds to the brand of TV to be controlled. If there is more than one code listed against the brand start with the first code.

The following handset keys are relevant to this procedure:

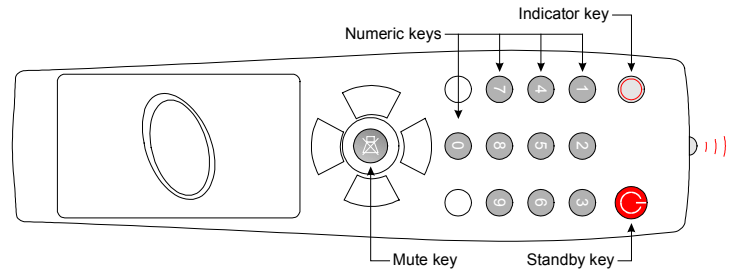

With good batteries installed in the handset, and after identifying the codes applicable to the TV set brand, follow the steps below.

- 1) Switch on the TV to be controlled.
- 2) While pressing and holding down the STANDBY key, hold down the MUTE key. Keep both keys pressed down for approximately two seconds until the INDICATOR key flashes once.
- 3) Use the numeric keys on the handset to enter the 3 digit code corresponding to the TV to be controlled.
- 4) Press and release the STANDBY key. The INDICATOR key should blink 3 times, indicating that the code has been stored in the handset's non-volatile memory.
- 5) While pointing the handset to the TV, try all of the functions of the remote control.
- 6) If the TV set does not respond or responds incorrectly to the commands, repeat steps 1 to 5 using the next code in the list, until a fully-functional code is found.
- 7) In case none of the codes provide the necessary functionality, please consult the corresponding page of the Scion's web site for the latest available TV set code information.


If the INDICATOR key does not blink 3 times at the end of step 4 an incorrect code has been entered. In this case, repeat steps 1 to 4.

Once the correct code is found, it should be noted on the label inside the battery compartment lid for future reference. It should also be noted on the corresponding section of this manual.

SET UP BY USING THE LIBRARY SEARCH FACILITY

If the correct code for the TV to be used cannot be identified from the list, a code search facility can be used.

The following handset keys are relevant to this procedure:

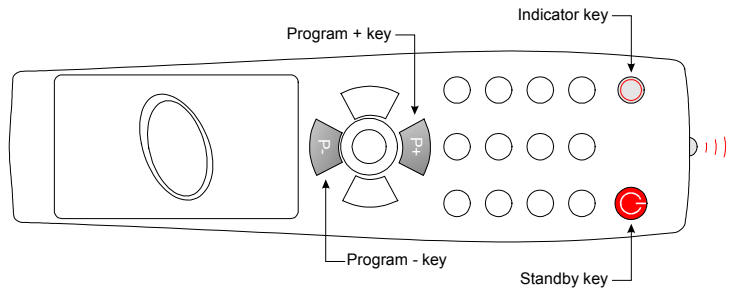


- 1) Switch on the TV to be controlled.
- 2) While pressing and holding down the STANDBY key, hold down the MUTE key. Keep both keys pressed down for approximately two seconds until the INDICATOR key flashes once.
- 3) Point the handset towards the TV and press either the **P+** or **P-** key repeatedly until the TV switches off. The **P+** key searches forwards through the library and the **P-** key searches backwards through the library. Alternatively, hold down the **P+** or **P-** key and the handset will scroll through all available codes at approximately one second per code.
- 4) When the TV switches off, stop pressing the key. Should it accidentally be pressed after the TV has switched off, back up by pressing the opposite key.
- 5) Press and release the STANDBY key. The INDICATOR key should blink 3 times, indicating that the code has been stored in the handset's non-volatile memory.
- 6) While pointing the handset to the TV, try all of the functions of the remote control.
- 7) If the TV does not respond correctly to the commands from the remote control continue the search process by repeating steps 1 to 6 until a suitable code is found. The handset will continue its search from the last code selected.
- 8) In case none of the codes provide the necessary functionality, please consult the corresponding page of the Scion's web site for the latest available TV set code information.

This method is quite time-consuming as the library contains a large number of codes that may have to be scrolled through.

READING OUT THE STORED CODE NUMBER

Having found a suitable code by the library search method, it is useful to identify the code number so that it may be noted on the label inside the battery compartment lid for future reference. It should also be noted on the corresponding section of this manual.

The following handset keys are relevant to this procedure:

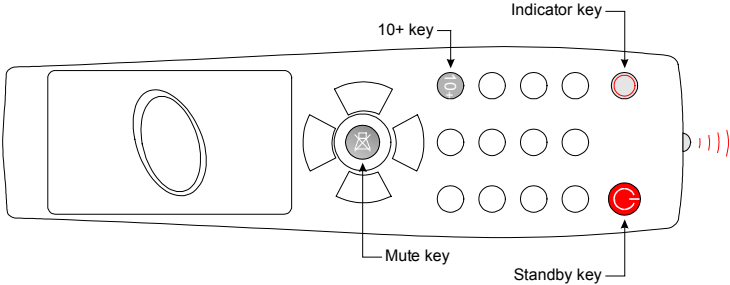

- 1) Press and hold down the STANDBY key on the handset and at the same time press and hold down the MUTE key. Keep both keys pressed down for approximately two seconds until the indicator lights and then release both keys.
- 2) Press and release the 10+ key.
- 3) The INDICATOR key will then blink the number of the first digit, pause, blink the number of the second digit, pause and then blink the number of the third digit. The table below indicates how to interpret the blinks.
- 4) The handset will then return automatically to normal status.

| Number Of Blinks | Digit |
|------------------|-------|
| 10 | 0 |
| 1 | 1 |
| 2 | 2 |
| 3 | 3 |
| 4 | 4 |
| 5 | 5 |
| 6 | 6 |
| 7 | 7 |
| 8 | 8 |
| 9 | 9 |

| Room | TV Set | Code |
|------|--------|------|
| | | |
| | | |
| | | |
| | | |
| | | |

3-DIGIT TV SET CODES

| | | | | | | | | | | |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ADMIRAL | 130 | 204 | | | | | | | | |
| ADYSON | 159 | 219 | | | | | | | | |
| AKAI | 001 | 009 | 010 | 108 | 130 | 132 | 139 | 140 | 143 | 242 |
| | 275 | 276 | 280 | | | | | | | |
| AKURA | 108 | 155 | 171 | 064 | 086 | 277 | | | | |
| ALBA | 009 | 060 | 064 | | | | | | | |
| ALLSTAR | 108 | | | | | | | | | |
| AMSTRAD | 006 | 025 | 143 | 245 | | | | | | |
| AMWAY | 108 | | | | | | | | | |
| ANITECH | 010 | 108 | 185 | 219 | 267 | | | | | |
| ANTECNO | 064 | | | | | | | | | |
| ARC EN CIEL | 173 | 179 | 239 | | | | | | | |
| ASA | 087 | 102 | 108 | 234 | 235 | | | | | |
| ASBERG | 185 | | | | | | | | | |
| ASORA | 171 | | | | | | | | | |
| ATLANTIC | 197 | 089 | | | | | | | | |
| AUDIOSONIC | 085 | | | | | | | | | |
| AUTOVOX | 159 | 163 | 197 | | | | | | | |

| | | | | | | | | | | |
|---------------------|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| BANK | 232 | | | | | | | | | |
| BEKO | 085 | 086 | 108 | 250 | 263 | | | | | |
| BESTAR | 086 | | | | | | | | | |
| BLAUPUNKT | 091 | 092 | 094 | 098 | 210 | 253 | 256 | | | |
| BONDSTEC | 163 | | | | | | | | | |
| BOSCH | 210 | | | | | | | | | |
| BRANDT ELECTRONIQUE | 173 | 179 | 225 | 239 | | | | | | |
| BRIONVEGA | 204 | | | | | | | | | |
| BSR | 143 | | | | | | | | | |
| BUSH | 009 | 130 | 139 | 143 | 232 | | | | | |

| | | | | | | | | | | |
|--------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| CENTURY | 164 | 204 | | | | | | | | |
| CGE | 139 | 164 | 164 | 210 | | | | | | |
| CIE | 025 | 108 | 170 | | | | | | | |
| CLARIVOX | 258 | | | | | | | | | |
| CLATRONIC | 009 | 010 | 064 | 108 | 143 | 149 | 159 | 164 | 171 | 185 |
| CONDOR | 108 | 149 | 171 | | | | | | | |
| CONIC | 219 | | | | | | | | | |
| CONTEC | 171 | 222 | | | | | | | | |
| CONTINENTAL EDISON | 173 | 179 | 225 | 239 | | | | | | |
| COSMOS | 108 | | | | | | | | | |
| CROSLEY | 164 | 204 | | | | | | | | |
| CROWN | 108 | 143 | 171 | 185 | 085 | 086 | 274 | | | |
| CS-ELECTRONICS | 064 | | | | | | | | | |

| | | | | | | | | | | |
|------------|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| DAEWOO | 108 | 121 | 127 | 170 | 269 | | | | | |
| DANSAI | 010 | 219 | | | | | | | | |
| DE GRAAF | 108 | 130 | | | | | | | | |
| DECCA | 070 | 108 | 159 | 161 | 184 | 189 | 206 | | | |
| DECCAVIDEO | 108 | | | | | | | | | |
| DUAL | 233 | | | | | | | | | |
| DUMONT | 204 | | | | | | | | | |

| | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|--|--|--|--|
| ELBE | 058 | 143 | 160 | 192 | 245 | 246 | | | | |
| ELBIT | 108 | 248 | | | | | | | | |
| ELECTROVENDA | 108 | | | | | | | | | |
| ELEKTRONIKA | 108 | | | | | | | | | |
| ELIN | 108 | | | | | | | | | |

| | | | | | | | | | | |
|----------|-----|-----|--|--|--|--|--|--|--|--|
| ELITE | 064 | 149 | | | | | | | | |
| ELMAN | 143 | | | | | | | | | |
| ELTA | 010 | 171 | | | | | | | | |
| EMERSON | 108 | 204 | | | | | | | | |
| ESC | 108 | | | | | | | | | |
| ETRON | 130 | 242 | | | | | | | | |
| EUROPHON | 143 | 159 | | | | | | | | |
| EXPERT | 089 | | | | | | | | | |

| | | | | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| FENNER | 171 | | | | | | | | | |
| FERGUSON | 078 | 080 | 160 | 182 | 194 | 198 | 199 | 200 | 201 | 202 |
| FINLANDIA | 194 | | | | | | | | | |
| FINLUX | 008 | 102 | 104 | 105 | 107 | 108 | 140 | 143 | 159 | 161 |
| | 234 | 235 | 087 | 275 | 276 | 189 | | | | |
| FIRST-LINE | 143 | | | | | | | | | |
| FISHER | 086 | 204 | 222 | 233 | | | | | | |
| FORMENTI | 108 | 149 | | | | | | | | |
| FRABA | 108 | | | | | | | | | |
| FRONTECH | 130 | 171 | 220 | | | | | | | |
| FUBA | 073 | 108 | | | | | | | | |
| FUJITSU GENERAL | 088 | 159 | 197 | | | | | | | |
| FUNAI | 010 | | | | | | | | | |

| | | | | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| GALAXIS | 108 | 185 | | | | | | | | |
| GALERIA | 171 | | | | | | | | | |
| GBC | 011 | 130 | 143 | 171 | 108 | 132 | 159 | 189 | | |
| GEC | 011 | | | | | | | | | |
| GELOSO | 064 | 130 | 143 | 164 | 171 | | | | | |
| GENERAL | 171 | | | | | | | | | |
| GENERAL TECHNIC | 171 | | | | | | | | | |
| GOLDHAND | 159 | 171 | | | | | | | | |
| GOLDSTAR | 038 | 108 | 130 | 143 | 159 | 163 | 166 | 171 | 191 | 219 |
| | 237 | 268 | | | | | | | | |
| GOODMANS | 009 | 064 | 108 | 121 | 159 | 170 | 171 | | | |
| GORENJE | 086 | | | | | | | | | |
| GPM | 010 | 064 | | | | | | | | |
| GRANADA | 027 | 105 | 108 | 111 | 121 | 130 | 140 | 159 | 161 | 167 |
| | 187 | 194 | 238 | | | | | | | |
| GRUNDIG | 091 | 092 | 094 | 098 | 172 | 232 | 238 | | | |

| | | | | | | | | | | |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| HCM | 010 | 108 | 159 | 171 | | | | | | |
| HIFIVOX | 173 | 179 | 239 | | | | | | | |
| HINARI | 010 | 064 | 108 | 130 | 171 | 242 | | | | |
| HIT | 204 | | | | | | | | | |
| HITACHI | 011 | 013 | 015 | 017 | 022 | 023 | 024 | 028 | 030 | 035 |
| | 039 | 040 | 053 | 130 | 132 | 140 | 143 | 159 | 054 | 055 |
| | 057 | 121 | 127 | 128 | 219 | 266 | 173 | 193 | | |
| HYPER | 009 | 159 | 163 | 171 | | | | | | |

| | | | | | | | | | | |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ICE | 009 | 010 | 064 | 108 | 171 | | | | | |
| IMPERIAL | 108 | 139 | 143 | 154 | 164 | 255 | 260 | 267 | | |
| INGERSOLL | 171 | | | | | | | | | |
| INNO HIT | 159 | 189 | 237 | | | | | | | |
| INTERBUY | 010 | | | | | | | | | |
| INTERCORD | 233 | | | | | | | | | |
| INTERFUNK | 108 | 113 | 130 | 141 | 143 | 164 | 179 | 210 | 242 | 244 |
| INTERVISION | 010 | 086 | 108 | 132 | 143 | 166 | | | | |
| IRRADIO | 163 | 235 | 237 | | | | | | | |
| ITC | 143 | 159 | | | | | | | | |
| ITS | 009 | 010 | 064 | 171 | | | | | | |
| ITT | 141 | 143 | 186 | | | | | | | |

| | | | | | | | | | | | | | | |
|-----|-----|-----|--|--|--|--|--|--|--|--|--|--|--|--|
| JVC | 009 | 169 | | | | | | | | | | | | |
|-----|-----|-----|--|--|--|--|--|--|--|--|--|--|--|--|

| | | | | | | | | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|--|--|--|--|--|--|--|--|--|
| KAIDO | 130 | | | | | | | | | | | | | |
| KAPSCH | 089 | | | | | | | | | | | | | |
| KARCHER | 108 | 143 | 197 | | | | | | | | | | | |
| KATHREIN | 108 | | | | | | | | | | | | | |
| KAWA | 009 | | | | | | | | | | | | | |
| KENDO | 060 | 108 | 130 | 143 | 245 | | | | | | | | | |
| KENNEDY | 197 | | | | | | | | | | | | | |
| KNEISSEL | 108 | | | | | | | | | | | | | |
| KONKA | 009 | | | | | | | | | | | | | |
| KORTING | 086 | 209 | 204 | | | | | | | | | | | |
| KUBA | 233 | | | | | | | | | | | | | |
| KUBA ELECTRONIC | 233 | | | | | | | | | | | | | |
| KURA | 130 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| LENCO | 108 | 170 | | | | | | | | | | | | |
| LIESENKOTTER | 108 | 210 | | | | | | | | | | | | |
| LIFETEC | 010 | 064 | 108 | 170 | | | | | | | | | | |
| LOEWE | 108 | 113 | 204 | 205 | | | | | | | | | | |
| LOGIK | 070 | 227 | | | | | | | | | | | | |
| LUMA | 130 | 197 | | | | | | | | | | | | |
| LUXOR | 102 | 104 | 130 | 132 | 138 | 140 | 143 | 186 | 237 | 242 | | | | |
| | 275 | 276 | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| M ELECTRONIC | 103 | 104 | | | | | | | | | | | | |
| MAGNADYNE | 163 | 164 | 204 | | | | | | | | | | | |
| MAGNAFON | 199 | | | | | | | | | | | | | |
| MAGNASONIC | 108 | | | | | | | | | | | | | |
| MARANTZ | 108 | | | | | | | | | | | | | |
| MARSHAL | 064 | | | | | | | | | | | | | |
| MATSUI | 009 | 016 | 025 | 060 | 061 | 062 | 063 | 070 | 108 | 130 | | | | |
| | 152 | 154 | 171 | 172 | 159 | | | | | | | | | |
| MERRIT | 132 | | | | | | | | | | | | | |
| METZ | 092 | 094 | 098 | 108 | 204 | 207 | 254 | 265 | | | | | | |
| MITSUBISHI | 075 | 076 | 077 | 094 | 113 | 204 | 222 | 224 | 240 | | | | | |
| MIVAR | 159 | 235 | 259 | 262 | | | | | | | | | | |
| MNARTT | 007 | | | | | | | | | | | | | |
| MTC | 086 | 108 | 130 | | | | | | | | | | | |
| MULTITECH | 130 | 159 | 171 | 185 | | | | | | | | | | |
| MURPHY | 232 | | | | | | | | | | | | | |

| | | | | | | | | | | | | | | |
|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|--|
| NAONIS | 130 | | | | | | | | | | | | | |
| NECKERMANN | 036 | 059 | 060 | 092 | 098 | 108 | 113 | 118 | 119 | 130 | | | | |
| | 143 | 159 | 245 | | | | | | | | | | | |
| NEI | 108 | 064 | | | | | | | | | | | | |
| NIKKAI | 219 | | | | | | | | | | | | | |
| NIKKO | 108 | | | | | | | | | | | | | |
| NOBLIKO | 232 | 235 | | | | | | | | | | | | |
| NOGAMATIC | 173 | 179 | 239 | | | | | | | | | | | |
| NOKIA | 102 | 103 | 104 | 108 | 130 | 132 | 138 | 140 | 141 | 143 | | | | |
| | 242 | 244 | 019 | 032 | 275 | 276 | 279 | 014 | | | | | | |
| NORDMENDE | 132 | 173 | 178 | 179 | 180 | 193 | 194 | 225 | 226 | 228 | | | | |
| | 239 | | | | | | | | | | | | | |
| NORMN | 108 | | | | | | | | | | | | | |
| NOVA | 087 | | | | | | | | | | | | | |
| OCEANIC | 103 | 104 | 130 | 140 | 143 | 032 | | | | | | | | |
| OKANO | 108 | | | | | | | | | | | | | |
| ONWA | 009 | 010 | 064 | | | | | | | | | | | |
| ORAVA | 108 | | | | | | | | | | | | | |

| | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| ORBITER | 086 | | | | | | | | | |
| ORION | 025 | 059 | 060 | 061 | 062 | 064 | 070 | 108 | 118 | 219 |
| OSAKE | 104 | | | | | | | | | |
| OTTO-VERSAND | 001 | 009 | 014 | 059 | 060 | 081 | 113 | 083 | 085 | 092 |
| | 094 | 098 | 108 | 111 | | | | | | |

| | | | | | | | | | | |
|-----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| PAEL | 235 | | | | | | | | | |
| PANASONIC | 001 | 167 | 229 | | | | | | | |
| PATHE CINEMA | 143 | | | | | | | | | |
| PATHE MARCONI | 173 | 179 | 225 | 239 | | | | | | |
| PHILCO | 090 | 108 | 139 | 143 | 164 | 164 | 204 | | | |
| PHILIPS | 065 | 066 | 067 | 092 | 108 | 111 | 127 | 193 | 251 | 252 |
| | 112 | 113 | 118 | 119 | 121 | 122 | 124 | | | |
| PIONEER | 193 | | | | | | | | | |
| PRANDONI-PRINCE | 130 | 235 | | | | | | | | |
| PRIMA | 219 | | | | | | | | | |
| PRO VISION | 108 | | | | | | | | | |
| PROFEX | 108 | 130 | 171 | | | | | | | |
| PROFITRONIC | 108 | | | | | | | | | |

| | | | | | | | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| QUELLE | 001 | 010 | 014 | 019 | 025 | 059 | 098 | 102 | 060 | 072 |
| | 086 | 087 | 088 | 092 | 094 | | | | | |

| | | | | | | | | | | |
|-------------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|
| RADIOLA | 108 | | | | | | | | | |
| RADIOTONE | 010 | 085 | 108 | 171 | | | | | | |
| REDIFUSSION | 187 | | | | | | | | | |
| REVOX | 108 | | | | | | | | | |
| REX | 088 | 089 | 143 | 164 | 197 | 245 | 246 | 247 | | |
| RFT | 064 | 085 | 130 | 204 | | | | | | |
| RITAR | 138 | | | | | | | | | |
| ROADSTAR | 108 | | | | | | | | | |
| ROSITA | 171 | | | | | | | | | |

| | | | | | | | | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| SABA | 078 | 143 | 173 | 178 | 179 | 193 | 225 | 226 | 239 | 244 |
| SAISHO | 025 | 060 | 070 | 130 | 159 | | | | | |
| SAKIO | 171 | | | | | | | | | |
| SALORA | 019 | 032 | 103 | 104 | 130 | 132 | 275 | 276 | 138 | 140 |
| | 142 | 143 | 237 | 241 | 242 | | | | | |
| SAMBERS | 235 | | | | | | | | | |
| SAMSUNG | 001 | 010 | 086 | 104 | 108 | 117 | 126 | 171 | 220 | 237 |
| | 257 | 268 | | | | | | | | |
| SANY | 193 | | | | | | | | | |
| SANYO | 014 | 018 | 019 | 020 | 032 | 051 | 052 | 086 | 087 | 189 |
| | 218 | 221 | 222 | | | | | | | |
| SCHNEIDER | 009 | 064 | 088 | 108 | 127 | 130 | 141 | 159 | 163 | 233 |
| | 242 | | | | | | | | | |
| SEG | 010 | 064 | 108 | 143 | 159 | 164 | 171 | 185 | 219 | 267 |
| SEI-SINUDYNE | 025 | 108 | 204 | 212 | | | | | | |
| SELECO | 088 | 089 | 130 | 143 | 197 | 222 | 245 | 246 | 247 | |
| SENTRA | 064 | 130 | 242 | | | | | | | |
| SHARP | 083 | 081 | 222 | | | | | | | |
| SHINTOM | 108 | | | | | | | | | |
| SHINTOSHI | 108 | | | | | | | | | |
| SHIVAKI | 108 | | | | | | | | | |
| SIAREM | 204 | | | | | | | | | |
| SIEMENS | 092 | 094 | 098 | 108 | 210 | 218 | 219 | 221 | 256 | |
| SIESTA | 085 | | | | | | | | | |
| SILVER | 010 | 064 | | | | | | | | |
| SINGER | 108 | 164 | 204 | | | | | | | |
| SINUDYNE | 118 | 130 | | | | | | | | |
| SMARAGO | 172 | | | | | | | | | |

| | | | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| SOLAVOX | 130 | 242 | | | | | | | | |
| SONOLOR | 140 | 143 | | | | | | | | |
| SONTEC | 108 | | | | | | | | | |
| SONY | 072 | 074 | 211 | 212 | 216 | 222 | | | | |
| SPECTRA | 170 | | | | | | | | | |
| STARLITE | 108 | 171 | | | | | | | | |
| STARLUX | 171 | | | | | | | | | |
| STERN | 088 | 089 | 130 | 143 | 197 | 245 | 247 | | | |
| SUNSTAR | 108 | 171 | | | | | | | | |
| SUPERTECH | 108 | 139 | 152 | 171 | | | | | | |

| | | | | | | | | | | |
|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| TADISTAR | 108 | | | | | | | | | |
| TASHIKO | 108 | 159 | 218 | | | | | | | |
| TATUNG | 161 | | | | | | | | | |
| TEC | 108 | 139 | 143 | 159 | 170 | 171 | | | | |
| TECHLINE | 185 | | | | | | | | | |
| TECHNISAT | 108 | 164 | 248 | | | | | | | |
| TECNISON | 108 | 171 | | | | | | | | |
| TEKON | 171 | | | | | | | | | |
| TELEAVIA | 173 | 178 | 179 | 225 | 239 | | | | | |
| TELEFUNKEN | 177 | 178 | 179 | 180 | 193 | 194 | 200 | 210 | 261 | 078 |
| TELEOPTA | 171 | | | | | | | | | |
| TELERNT | 108 | | | | | | | | | |
| TELETECH | 164 | 171 | | | | | | | | |
| TELETEXT | 113 | | | | | | | | | |
| TELETON | 130 | 159 | 197 | 088 | 089 | | | | | |
| TENSAI | 108 | 143 | 149 | 171 | 191 | 064 | | | | |
| TENSON | 171 | | | | | | | | | |
| TESLA | 204 | | | | | | | | | |
| THOMSON | 078 | 080 | 130 | 173 | 178 | 179 | 180 | 193 | 194 | 225 |
| | 239 | 261 | 270 | | | | | | | |
| THORN | 011 | 014 | 016 | 018 | 027 | 028 | 102 | 104 | 107 | 108 |
| | 118 | 130 | 042 | 066 | 072 | 075 | 080 | 087 | 141 | 143 |
| | 160 | 182 | 244 | 094 | | | | | | |
| THORN-FERGUSON | 160 | 188 | 227 | | | | | | | |
| TOSHIBA | 012 | 016 | 027 | 031 | 036 | 042 | 043 | 222 | 232 | |
| TOWADA | 143 | 185 | | | | | | | | |
| TRISTAR | 010 | 064 | | | | | | | | |
| TRIUMPH | 025 | 219 | 234 | | | | | | | |

| | | | | | | | | | | |
|-----------|-----|-----|-----|-----|-----|-----|--|--|--|--|
| UHER | 089 | 108 | 149 | 185 | 197 | 233 | | | | |
| ULTRAVOX | 108 | 164 | 185 | 204 | | | | | | |
| UNIVERSUM | 249 | 275 | 276 | | | | | | | |
| UNIVOX | 204 | | | | | | | | | |

| | | | | | | | | | | |
|--------------------|-----|-----|-----|-----|--|--|--|--|--|--|
| VESTEL | 108 | 249 | 264 | | | | | | | |
| VIDEOSAT | 164 | | | | | | | | | |
| VIDEOTON | 178 | 193 | | | | | | | | |
| VIDEOWAY | 230 | | | | | | | | | |
| VISION | 108 | 149 | | | | | | | | |
| VOXSON | 130 | 204 | | | | | | | | |
| WALTHAM | 178 | | | | | | | | | |
| WATSON | 064 | 108 | 149 | 171 | | | | | | |
| WEGA | 204 | 222 | | | | | | | | |
| WHITE WESTINGHOUSE | 108 | 149 | | | | | | | | |

| | | | | | | | | | | |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|
| YOKO | 010 | 064 | 108 | 130 | 143 | 159 | 164 | 170 | 171 | |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|

| | | | | | | | | | | |
|---------|-----|-----|--|--|--|--|--|--|--|--|
| ZANUSSI | 130 | 197 | | | | | | | | |
| ZENITH | 231 | | | | | | | | | |

DECLARATION OF CONFORMITY

Scion Technologies Limited declares that the following equipment:

PRO-6000 6 room distribution system,
PRO-6001 SCART receiver,
PRO-6002 SCART transmitter,
PRO-6004 RCA (phono) receiver,
PRO-6005 RCA (phono) transmitter,
PRO-6010 5 channel VHF / UHF demodulator,
PRO-6020 8 way RF distribution amplifier,
PRO-6060 wall mount LCD key pad controller, Victorian brass finish,
PRO-6061 wall mount LCD key pad controller, stainless steel finish,
PRO-6062 wall mount LCD key pad controller, white plastic finish,
PRO-0000 infra-red receiver mouse,
PRO-0000 infra-red transmitter single button,
PRO-0000 infra-red transmitter dual button
PRO-0000 infra-red remote control handset;

complies with the standards and directives:

| | | |
|--------------------------------------|--------------------------------------|--------------------------------------|
| IEC 60950, IEC 60950, | IEC 60950, IEC 60950, | IEC 60950, IEC 60950; |
| BS EN 12345, BS EN 12345, | BS EN 12345, BS EN 12345, | BS EN 12345, BS EN 12345; |
| Directive 00/00, Directive 00/00, | Directive 00/00, Directive 00/00, | Directive 00/00, Directive 00/00. |

The above equipment is only intended for indoors domestic use in countries with nominal mains voltages of 220 to 240 V AC 50 Hz; and using the PAL B/G, PAL D/K, PAL I, SECAM B/G, SECAM D/K and SECAM L/L television standards. The equipment is designed only for use in IEC safety zone 4, and should never be used in or in conjunction with other equipment located in IEC safety zones 0, 1, 2 and 3.

TECHNICAL SPECIFICATIONS

| Parameter | Magnitude |
|---------------------------------------|---|
| Maximum control distance ¹ | 10 metres at boresight of the infra-red LED |
| Vertical transmission angle | ± 10° from boresight of the infra-red LED |
| Horizontal transmission angle | ± 15° from boresight of the infra-red LED |

1 The maximum control distance on a straight line at bore sight of the emitting LED depends on the combined sensitivity of the device to be controlled and on the optical output of the remote control, which is largely affected by the condition of it's batteries.

| Parameter | Specification |
|---------------------------|---|
| Battery type | Two 1.5 V batteries, type AAA or UM4 or R04 |
| Battery life ² | Typical 6 months |

2 The battery life will depend on the quality of the battery, environmental temperature and frequency of use of the remote control.



Scion Technology
Scion Business Park
Brimpton Common, Reading
Berkshire RG7 4RN
United Kingdom
<http://www.sciontech.com>
Tel + 44 (0)1189 821462
Fax + 44 (0)1189 821464

© Scion Technology 2004